

基于WebMatrix的轻量级Web开发

九、WebMatrix中的使用技巧

邹健

Blog : <http://www.cnblogs.com/chsword>

Email: chsword@126.com

Microsoft



今日内容


1. WebMatrix代码编写技巧
2. WebMatrix调试技巧

WebMatrix代码编写技巧

编码技巧

- 使用_AppStart
- 使用_PageStart
- 使用更有意义的URL


_AppStart执行流程

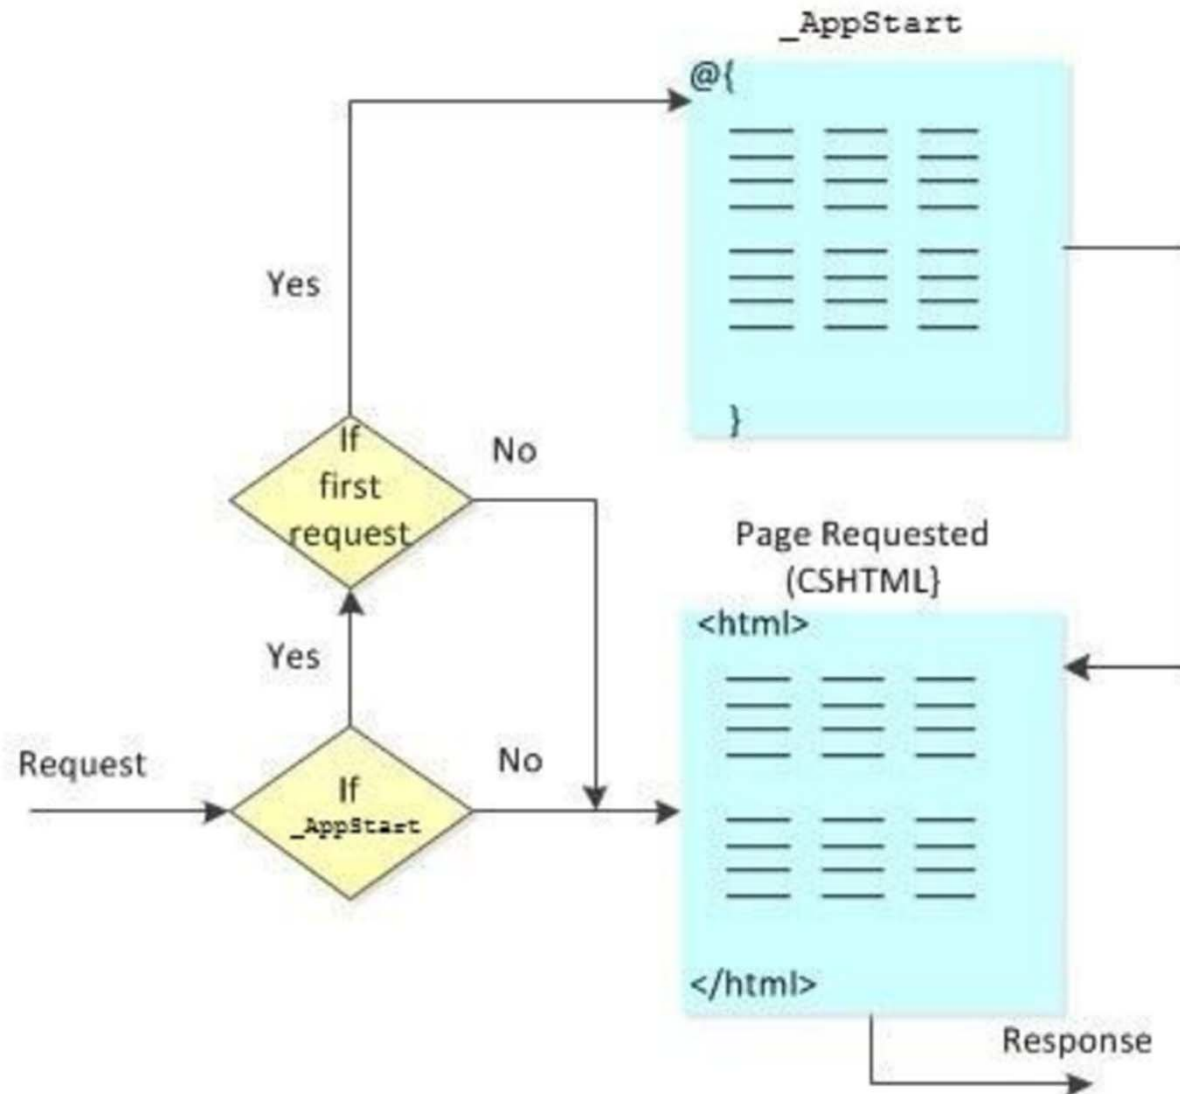

_AppStart的作用

- 设置全局变量
- 设置Helepr的初始值

_PageStart执行流程

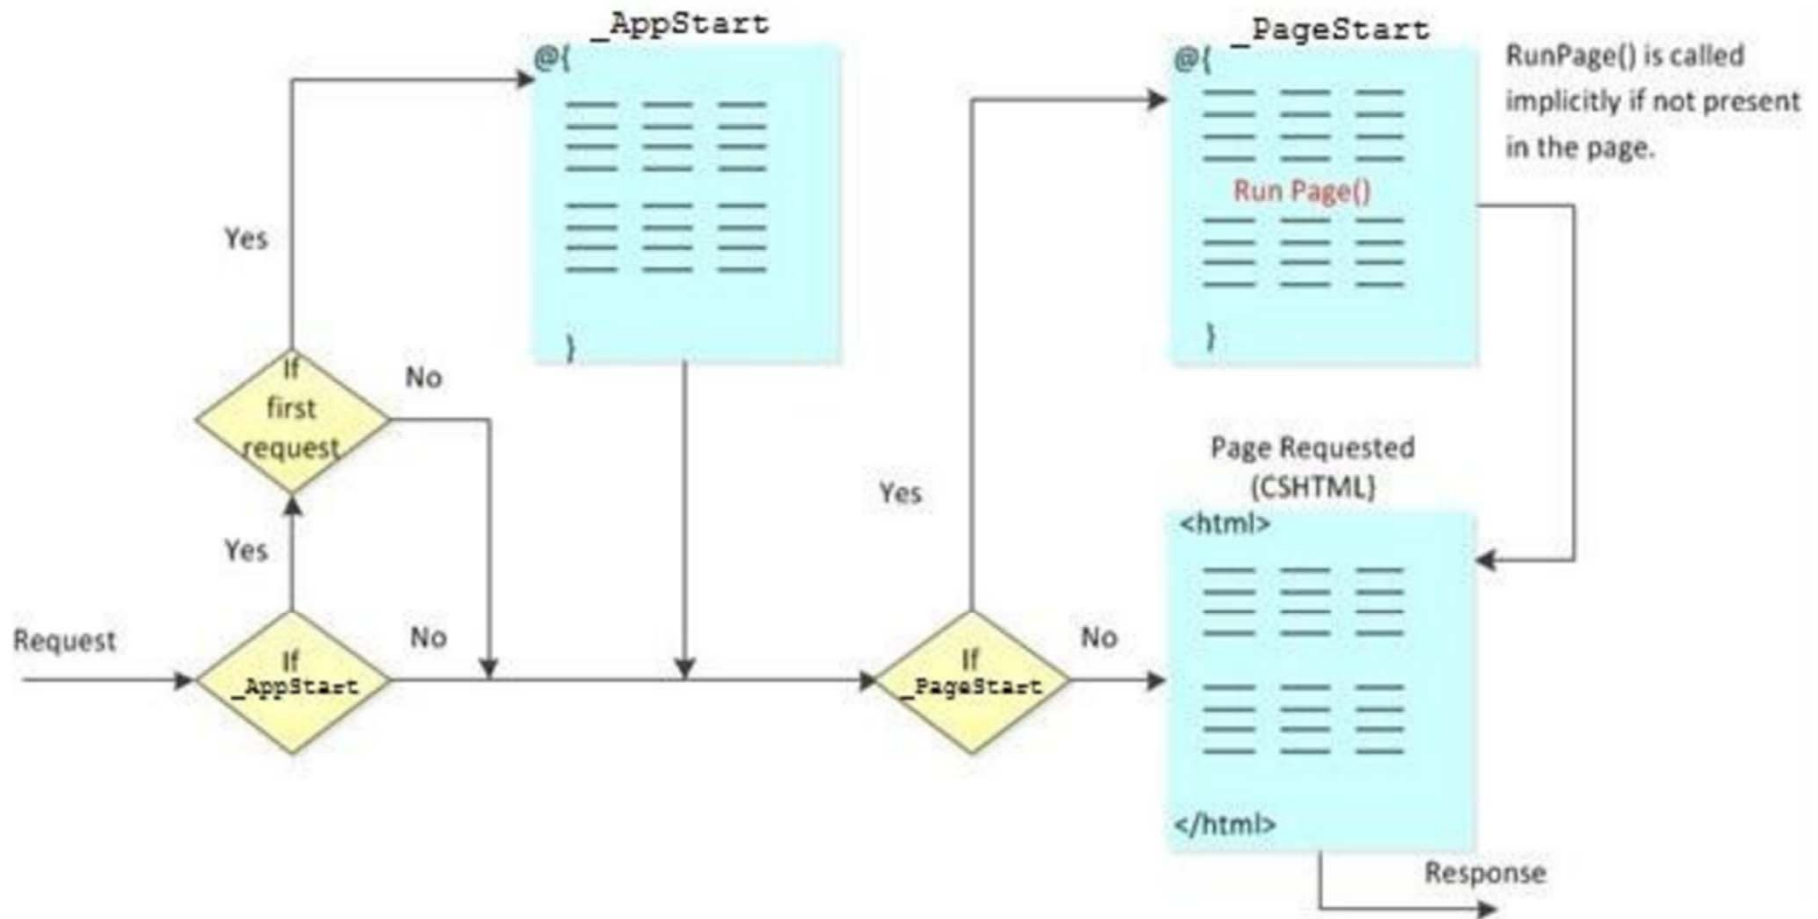

_PageStart的作用

- 初始化页面所需变量
- 初始化母板页设置
- 使用RunPage()方法提供前类似Filter功能
- 处理错误
- 控制文件夹访问

使用更有意义的URL

- 使用URLRouting完成路径转换
- 使用UrlData获取参数
- 使用@Href生成Url

WebMatrix调试技巧

调试WebMatrix的技巧

- 适当使用ObjectInfo
- 使用IE DevTool
- 使用FireBug
- 使用Visual Studio 进行调试



© 2009 Microsoft Corporation. All rights reserved. Microsoft, MSDN, the MSDN logo, and [list other trademarks referenced] are trademarks of the Microsoft group of companies. The information herein is for informational purposes only and represents the current view of Microsoft Corporation as of the date of this presentation. Because Microsoft must respond to changing market conditions, it should not be interpreted to be a commitment on the part of Microsoft, and Microsoft cannot guarantee the accuracy of any information provided after the date of this presentation. MICROSOFT MAKES NO WARRANTIES, EXPRESS, IMPLIED, OR STATUTORY, AS TO THE INFORMATION IN THIS PRESENTATION.